

PREMIUM SERIES

3240

1/2 HP Screw Drive
Garage Door Opener




SMOOTH RUNNING, EVEN IN THE MOST EXTREME TEMPERATURES.

For consumers who want the latest advance in smooth-running performance with a completely maintenance-free drive system, 3240 is ideal.

Our engineers replaced the two-piece plastic liner and aluminum rail system with a stronger, simpler one-piece steel rail. So there is much less friction, no binding and no lubrication is required. Driven by a capable 1/2 HP motor. Also equipped with a Motor Vibration Isolation System (MVIS®)...a revolutionary floating motor design that eliminates powerhead vibration for performance as smooth as you'll get anywhere.

- 200-watt lighting
- Meets all UL325 requirements
- Lifetime motor warranty

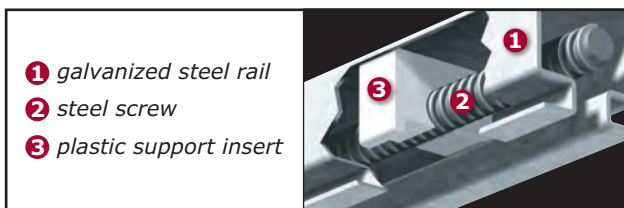

At Chamberlain, safety is a major part of our mission.
It's our commitment to you and, quite simply, the way we produce products every day. Our LiftMaster® products are designed to move the largest door in your home, safely, securely and by always putting safety first.

ACCESSORIES INCLUDED



Multi-Function Control Panel

The standard in control. Controls garage door and turns opener lights on/off from inside the garage. Locks out radio signals while you're away. Includes adjustable light timer and illuminated oversized push button.



Security+® 3-Button Remote Control

With rolling code technology, you are assured of a new code with every use. Every time you come and go, your code changes to one of over 100-billion new codes, never to be repeated.

CHAMBERLAIN®

LiftMaster®

3240

SPECIFICATIONS

UNSURPASSED SAFETY AND SECURITY

All LiftMaster® garage door openers are manufactured with the highest level of safety and monitoring systems to ensure safe operation.

- The Protector System® safety sensors reverse the door automatically if the infrared beam is broken, before contact is made.
- Patented technology detects when a door spring breaks and triggers the motor to reverse the door to the full open position.
- Sensing technology will stop the door from closing if contact is made with a person or object.
- Security+® Rolling Code Technology assures a new code is sent every time the remote is used.
- Patented PosiLock® system ensures the door remains securely locked when it is closed.
- Opener light turns on automatically when The Protector System® safety infrared beam is broken.

STANDARD SPECIFICATIONS

DIMENSIONS

Installed Length: 128"
 Maximum Door Opening: 7' 6 1/2"*
 Headroom Clearance Required: 2.3"
 *Up to 8' 6" with optional rail

CARTONS

Number of Cartons: 2
 Carton 1 Dimensions and Contents:
 12" x 8 1/8" x 20"
 Multi-Function Control Panel
 373LM Remote Control
 Garage Door Opener Head
 The Protector System®
 Carton 2 Dimensions and Contents:
 114" x 3" x 3"
 Assembled Solid-Steel Screw Rail

SECURITY+® RADIO CONTROLS

Coding System: Smart Receiver Code Button and Indicator Light
 Operating Range: 150' (approximately)
 Operating Temperature: -40°F to 150°F
 Battery (remote control): 3-Volt
 Frequency: 315MHz
 373LM 3-Button Remote Control

CONVENIENCE/SAFETY

The Protector System®
 Emergency/Quick Release
 Automatic Trolley Reconnect
 Manual Mode Setting
 Ventilation/Pet Opening
 Down Safety Reverse
 Up Safety Stop
 Door Open/Beam Broken/Lights On
 PosiLock®

ELECTRICAL SPECIFICATIONS

POWER

Voltage: 120V AC, 60Hz; Wattage: 540; Current Rating: 4.5
 UL Listings: Yes; Length of Line Cord: 4' (3-prong)

LOGIC TYPE

Solid-State Microcontroller with Built-in Surge Suppressor

LIGHTING

Twin Light Sockets
 Number of Bulbs: 2
 Maximum Wattage: 100 Each Bulb
 Length of Light Delay: Adjustable
 Type of Light Delay: Solid-State

MECHANICAL SPECIFICATIONS

MOTOR

Horsepower: 1/2
 RPM: 1,625
 Thermal Protection: Automatic
 Lubrication: Permanent

DRIVE MECHANISM

Drive Means: Screw
 Reduction Means: Belt
 Door Linkage: Adjustable Door Arm

ADJUSTMENTS

Force: Internal Up and Down
 Limit: Internal

TRAVEL RATE

Approximately 7.5"/Second

SHIPPING WEIGHTS

Head: 22 Lbs.
 Rail: Screw—23 Lbs.

MATERIALS

Chassis: Steel
 Rail: Steel
 Trolley: Steel

LIFETIME MOTOR WARRANTY

1 year on all other parts. For more information, refer to owner's manual. LiftMaster® garage door openers meet all current state and federal regulations and UL safety regulations as of date of manufacture.



The in-vehicle universal remote control. See your automobile dealer for availability.

ENHANCE YOUR LIFESTYLE WITH OPTIONAL ACCESSORIES



know for sure the door is closed

Lets you know whether the garage door is open or closed from any room in the house. A flashing red light shows the door is open; a glowing green light indicates the door is closed.

GARAGE DOOR MONITOR (915LM)

enter without a key

Open your garage door without using a remote control and close with just the push of a button. Also can be programmed with a temporary entry code for friends and service people.



WIRELESS KEYLESS ENTRY with SECURITY+® (377LM)

access on the go

Operates up to 3 garage doors. Turns garage door opener lights on and off. Fits on keychain or in a pocket or purse.



MINI 3-BUTTON REMOTE CONTROL with SECURITY+® (370LM)

put control where you want it

For people who want a second control in their garages. A light control button turns garage door opener lights on and off. Auxiliary button can be programmed to open and close a second garage door.



WIRELESS CONTROL PANEL (378LM)

park perfectly every time

The high-tech solution that helps you park perfectly in your garage! As you pull into your garage the laser is activated and projected onto the dashboard, making it easy to park in the same spot every time.



LASER GARAGE PARKING ASSIST (975LM)

CHAMBERLAIN®
LiftMaster®

World's #1 Installed Garage Door Opener

THE CHAMBERLAIN GROUP, INC.
 845 Larch Avenue • Elmhurst, IL 60126
www.liftmaster.com



WARNING: Garage doors and openers can be dangerous if not properly installed, tested and operated. Children should be supervised by an adult whenever in or around the garage area.

©2007 LM 3240 06/07

The Chamberlain Group, Inc.
 Printed in U.S.A.

LMCA3240